

# SELF PRIMING PERIPHERAL PUMPS

PASQB80 • PASQB60-SK



WATER PUMPS

## APPLICATION

- Clean water without abrasive particles / Non-aggressive liquid
- Domestic use
- In particular for delivering water in combination with small pressure sets for irrigation
- Installed in enclosed places, or at least protected against inclement weather

## OPERATING CONDITIONS

- Suction lift up to 6 m
- Liquid temperature up to +40°C
- Ambient temperature up to +40°C
- Max. working pressure: 6 bar



## MOTOR

- 2-Pole induction motor
- Single-phase 50 Hz
- 0.75 kW
- Insulation: Class B
- Protection: IP44
- With capacitor and thermal overload protection

## MATERIALS

- Pump body - Cast iron
- Motor support - Aluminium
- Impeller - Brass
- Motor shaft - Stainless Steel
- Mechanical seal - Ceramic-Graphite
- 100% Copper winding

FLOW (ℓ/h)	PRESSURE (bar)
3380	0.6
3030	1.5
2470	2.2
2010	2.8
1410	3.6
1050	4.0
550	4.6
0	5.2

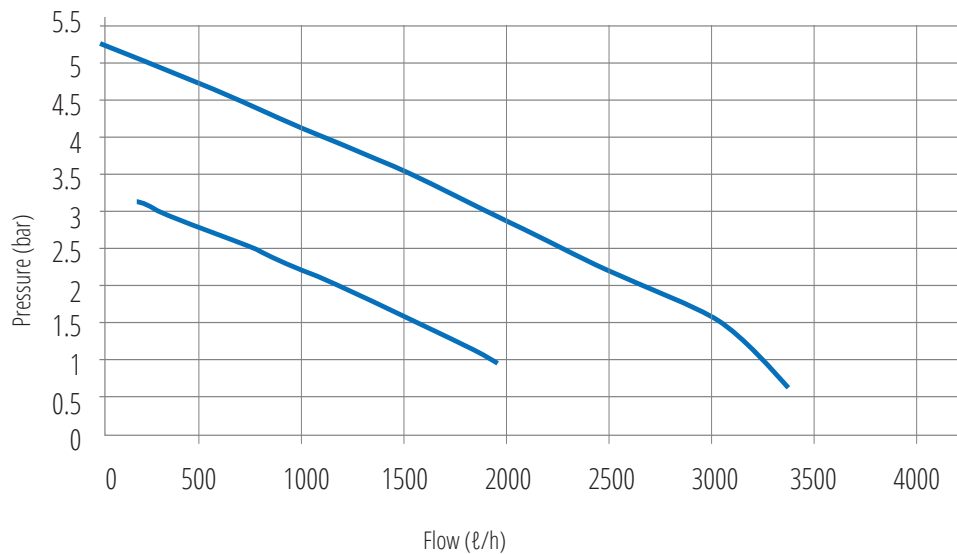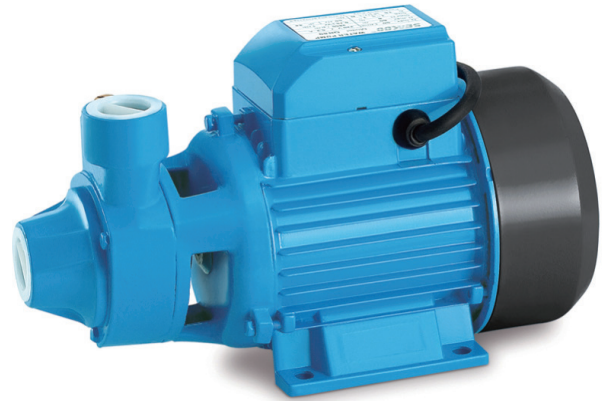

TYPE	POWER (W)	VOLTAGE (V)	INLET	OUTLET	MAX FLOW (m <sup>3</sup> /h)	MAX HEAD (m)	MAX SUCTION (m)
PASQB80	750	230	1"	1"	3	60	8
PASQB60	370	230	1"	1"	1,6	33	8

## SELF PRIMING PERIPHERAL PUMP WITH FLOW CONTROL

PASQBSK

PASCALI self priming PERIPHERAL pump with flow control. For domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller.



FLOW SWITCH  
PASSK10

Max 10 Amps.

Non return valve included.

## SELF PRIMING PERIPHERAL PUMP WITH PRESSURE CONTROL

PASQB/24

PASCALI self priming PERIPHERAL pump with 24 ℓ pressure control system. For domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller.



24L TANK  
PAS24L

Complete steel tank.

Non return valve included.